

CATALOGUE 2020

eSATAp 3 in 1

eSATAp 3 in 1 is eSATAp, USB3.0 and USB2.0 integrated in one connector, you can connect not only Power Over eSATA devices but also standard eSATA and standard USB3.0/2.0 devices.



eSATAp 3 in 1



02



42508
External Enclosure mSATA SSD >
Multiport USB 3.0 + eSATAp

03



42554
2.5" External Enclosure SATA HDD >
Multiport SuperSpeed USB 10 Gbps

04



42556
2.5" External Enclosure SATA HDD >
Multiport SuperSpeed USB 10 Gbps

05



42566
External Enclosure mSATA SSD >
Multiport SuperSpeed USB 10 Gbps

06



61776
Adapter USB 3.0 to eSATAp

07



61862
Front Panel 2 x Multiport USB 3.0 +
eSATAp

08



63921
Slot bracket 1 x eSATAp 5 V / 12 V

09



65119
Adapter Power-over-eSATA (with USB) >
1x eSATA and 1x USB

10



89288
PCI Express Card >
2 x Multiport USB 3.0 + eSATAp

External Enclosure mSATA SSD > Multiport USB 3.0 + eSATAp



For mSATA memory 1.5 Gb/s, 3 Gb/s and 6 Gb/s SSD with half size or full size

black



with full-PCB



Data Transfer rate

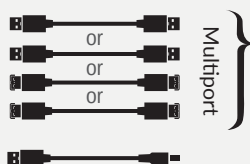


optional connecting cables

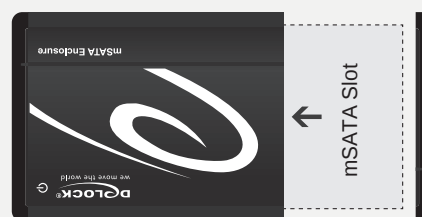

① USB 3.0 | USB 2.0 | eSATAp | eSATA

② DC 5V



Windows
7/7-64/8.1/8.1-64/
10/10-64



Mac OS
ex 10.8.2



Linux
Mint



PCB
Full-PCB



LED indicator for
power



Dimensions
82.5 x 60 x 12 mm



Hot Swap
Plug & Play

2.5" External Enclosure SATA HDD > Multiport SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)

Suitable for 2.5" SATA HDD / SSD: HDD height up to 9.5 mm




Chipset: Asmedia ASM1351 + ASM1456

silver

with full-PCB



Data Transfer rate



① USB 3.1 (Gen 2) | USB 3.0 | USB 2.0 | eSATAp | eSATA ② DC 5V



2.5" SATA
HDD / SSD



Windows
7/7-64/8.1/8.1-64/
10/10-64



LED indicator for
power



PCB
Full-PCB



HDD Height
up to 9.5 mm



Dimensions
136 x 80 x 16 mm



Hot Swap
Plug & Play

2.5" External Enclosure SATA HDD > Multiport SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)

Suitable for 2.5" SATA HDD / SSD: HDD height up to 15 mm




Chipset: Asmedia ASM1351 + ASM1456

black

with full-PCB



Data Transfer rate



① USB 3.1 (Gen 2) | USB 3.0 | USB 2.0 | eSATAp | eSATA ② DC 5V



2.5" SATA
HDD / SSD



Windows

7/7-64/8.1/8.1-64/
10/10-64



LED indicator for
power



PCB
Full-PCB



HDD Height
up to 15 mm



Dimensions
136 x 80 x 21 mm



Hot Swap
Plug & Play

External Enclosure mSATA SSD >
Multiport SuperSpeed USB 10 Gbps
(USB 3.1 Gen 2)


For mSATA memory 1.5 Gb/s, 3 Gb/s and 6 Gb/s SSD with half size or full size
Chipset: Asmedia ASM1351

black

with full-PCB



Data Transfer rate



Windows
7/7-64/8.1/8.1-64/
10/10-64



Mac OS
10.12



Linux
ex kernel



PCB
Full-PCB



LED indicator for power



Dimensions
82.5 x 60 x 12 mm



Hot Swap
Plug & Play

Adapter USB 3.0 to eSATAp


Supports SATA 1.5 Gb/s and SATA 3 Gb/s devices
USB: only voltage supply, no data transfer

black



Data Transfer rate

3 Gbps
eSATA



① eSATAp | eSATA



optional connecting cables



Windows

XP/XP-64/Vista/
Vista-64/7/7-64/8



Linux

ex Kernel 2.6



Mac OS

ex 10.7



voltage
eSATA 5 V



transfer rate up to
3 Gb/s



Hot Swap
Plug & Play




Front Panel 2 x Multiport USB 3.0 + eSATAp

For installation into 3.5 bay

Slot bracket for installation into a PC slot

OS independent, no driver installation required

black



① eSATAp



optional connecting cables






voltage
eSATAp 5 V



Hot Swap
Plug & Play

Slot bracket 1 x eSATApd 5 V / 12 V

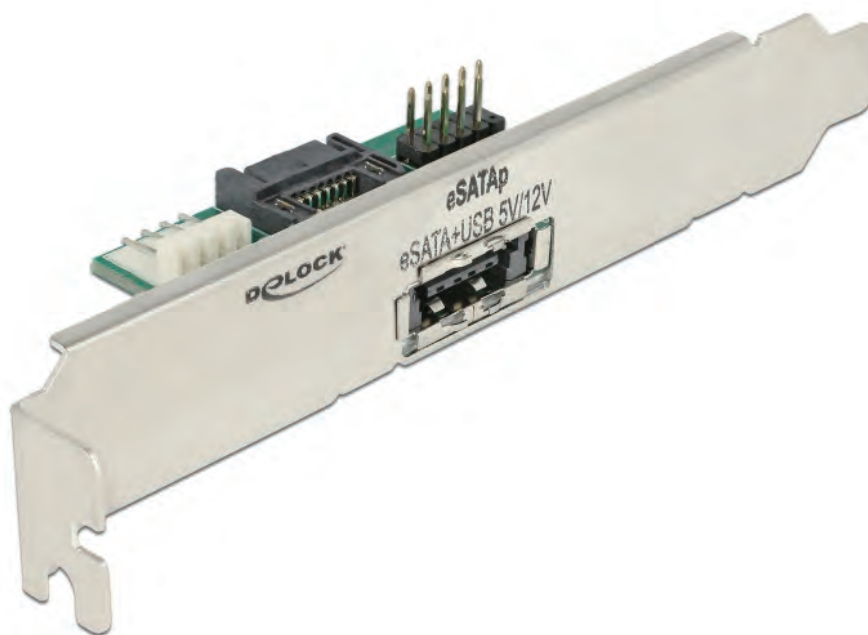

① USB 3.0 | USB 2.0 | eSATApd | eSATA



optional connecting cables



Voltage
eSATApd 5 V and 12 V

Adapter Power-over-eSATA (with USB) > 1x eSATA and 1x USB



black



Data Transfer rate



480 Mbps
USB 2.0

3 Gbps
eSATA



① eSATAp

② USB



or

optional connecting cables



transfer rate eSATA up to
3 Gb/s




transfer rate USB up to
480 Mbps


PCI Express Card > 2 x Multiport USB 3.0 + eSATAp

Supports SATA Port Multiplier


PCIe 2.0

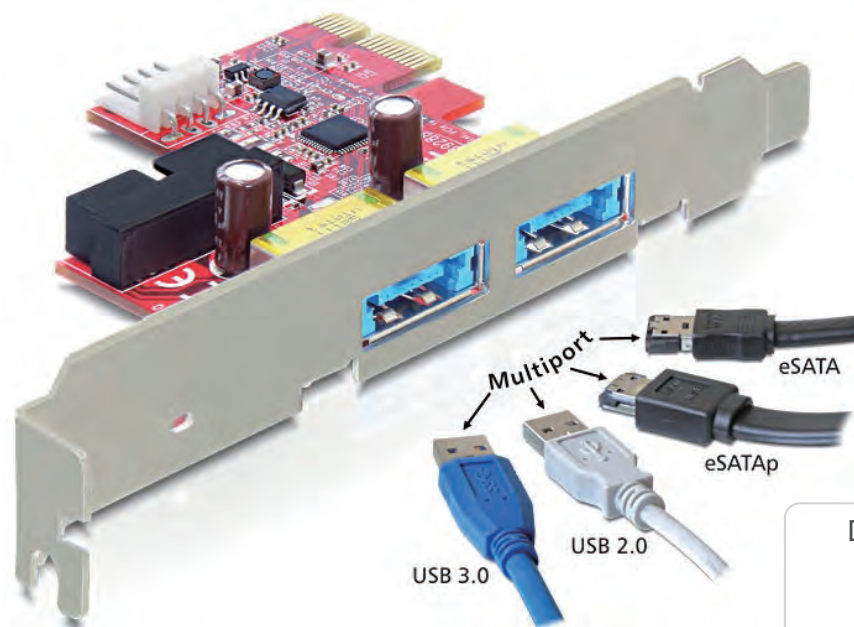

Data Transfer rate



① USB 3.0 | USB 2.0 | eSATAp | eSATA



optional connecting cables



Windows

2000/XP/XP-XP/64/
Server-2003/Server-2003-64
Vista/Vista-64/7/7-64



Voltage
eSATAp 5 V