

Connection Cable MD6 female serial > 3.5 mm 3 pin stereo jack male 90° TTL (5 V)


Chipset: ASIX ZT3221LEEY

black

52 cm




CE

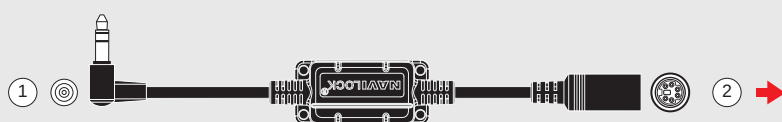

① 3.5 mm 3 pin stereo jack male 90° ② MD6 female

Navilock MD6 Serial Receiver

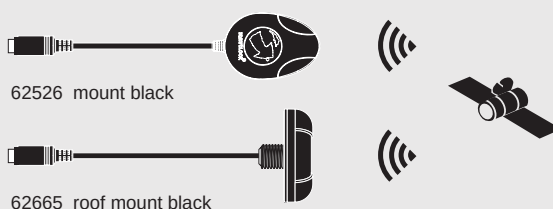

Voltage
5 V



Cable gauge
28 AWG



data transfer
un-directional



for
MD6 GNSS receiver