

Connection Cable M8 female serial waterproof > 2.5 mm 4 pin stereo jack male 90° LVTTTL (3.3 V)


Chipset: ASIX ZT3221LEET

black

1.2 m




CE

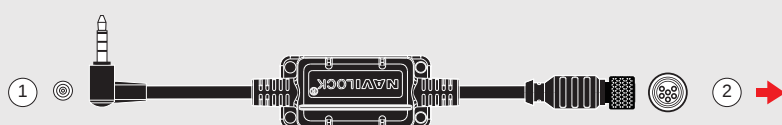

① 2.5 mm 4 pin stereo jack male 90° ② M8 female

Navilock M8 GNSS Receiver

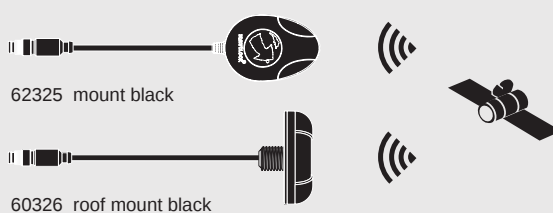

connector
Waterproof



Voltage
3.3 V



Cable gauge
28 AWG



data transfer
bi-directional



for
M8 GNSS receiver